




Pocket filter rough dust

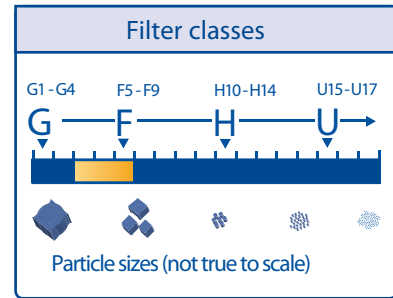

Applications

For rough dust filtration in aerial engineering devices of all kinds

- Air conditioning in offices, schools, laboratories
- Prefiltration for fine filters
- Prefiltration for paint shops

Classification acc. to EN 779

- Filter class **G3 (EU3)**
- Filter class **G4 (EU4)**
- Filter class **F5 (EU5)**


Versions

- Standard sizes welded
- Special sizes on request
- Frame types:
Plastic frame (25mm),
Metal frame (20 or 25mm)
- Optional with foamed hygiene-gasket
- Filters with plastic frame are fully incinerable

Material characteristics

- Tested according to EN 779
- Shatter-proof synthetic fibres, environmentally safe
- Fire prevention requirements according to DIN 53438 (F1)
- Humidity resistant up to 100% r. h.
- Temperature resistant up to 80°C depending on type of frame
- Lacquer compatibility according to IPA-control
- High self-rigidity of the pockets

Benefits of VOLZ Filters




Progressive structure

- The filter medium is compressed towards clean air side and takes full depth of fibrous web for dust absorption



Higher density

- Higher density and pressure load due to endless pockets and their edge welding



Hygiene-gasket (optional)

- Hygiene-gasket on pocket filter frame available on the clean air side or on the dust air side
- Abrasion-resistant, silicone-free, closed porous





- Filter media and all components are produced in our plant in Germany
- Quality control of the complete production with internal filter test equipment and modern quality-management-tools
- Öko-Tex Standard 100 - tested for harmful substances
- Environment-friendly and easily disposable


Standard versions for pocket filter G3 - F5							
Width x Height	Depth	Number of pockets	Filter area	Width x Height	Depth	Number of pockets	Filter surface
	mm		m ²		mm		m ²
592 x 592 mm *1	200	6	1.6	592 x 490 mm *2	200	6	1.5
	300	6	2.4		300	6	2.1
	360	6	2.7		360	6	2.5
	500	6	3.9		500	6	3.4
	600	6	4.5		600	6	4.0
490 x 592 mm *1	200	5	1.3	592 x 287 mm *1	200	6	0.9
	300	5	1.9		300	6	1.2
	360	5	2.3		360	6	1.4
	500	5	3.2		500	6	2.0
	600	5	3.8		600	6	2.2
287 x 592 mm *1	200	3	0.8	287 x 287 mm *1	200	3	0.4
	300	3	1.2		300	3	0.5
	360	3	1.4		360	3	0.7
	500	3	1.9		500	3	1.0
	600	3	2.3		600	3	1.1

- Plastic frame (25mm), metal frame (20 or 25mm)
- Optional with foamed hygiene-gasket
- Pocket filters with plastic frame must be used holohedral incumbent
- Special sizes and special depths available on request

*1 Standard sizes welded
*2 Special sizes stitched

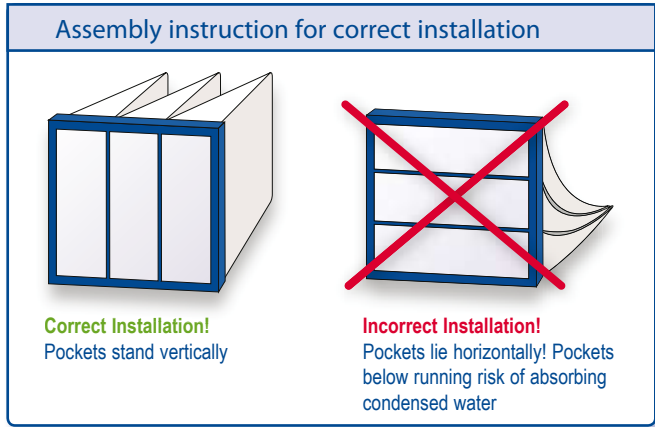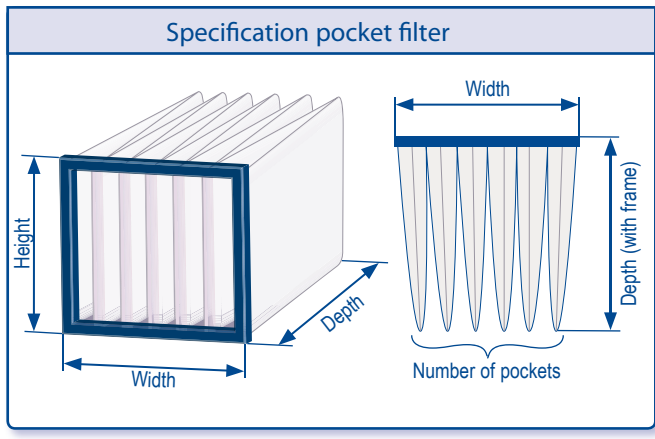

Pocket filter rough dust; G4 (EU4) 592 x 592 x 600; 6 pockets			
Initial pressure drop (Pa)	40	Average arrestance (%)	≥ 90
Recommended final pressure drop (Pa)	250		
Nominal air flow rate (m ³ /h)	3400	Filter area (m ²)	4.5

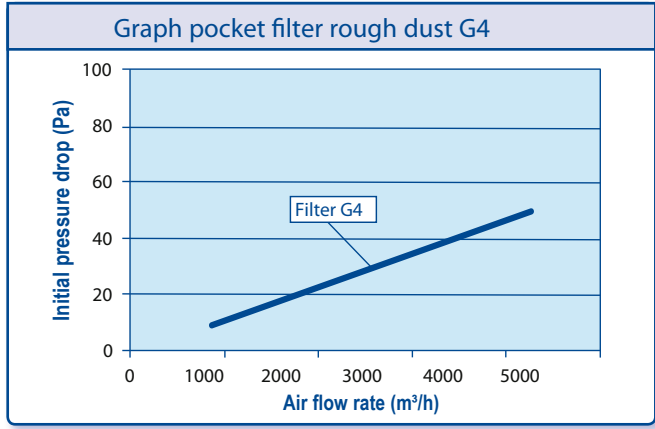

VOLZ Luftfilter GmbH & Co. KG
 Robert-Bosch-Straße 25 Phone: +49-(0)7451-5516-0 info@volzfilters.com
 D-72160 Horb am Neckar Fax: +49-(0)7451-5516-120 www.danfilter.dk

All information, images and pictures are property of VOLZ Luftfilter GmbH & Co. KG and are provided to the best knowledge. However VOLZ Luftfilter GmbH & Co. KG does not guarantee the completeness or correctness and cannot be held responsible for damages caused by the recipient's usage or his confidence in the completeness or correctness of the information. The stated data contains average values with tolerances as a result of production irregularities; therefore it does not relieve the recipient of own examination and tests. For the correctness of the information in particular cases, an explicit and written affirmation through VOLZ Luftfilter GmbH & Co. KG is required. Furthermore, the data serves as a service description and cannot be interpreted as warranted properties or durabilities.