




Rough filtration mats



CONFIDENCE IN TEXTILES
 Test sustancias nocivas
 Schadstoffgeprüfte Textilien
 Tested for harmful substances
 Contrôle de substances indésirables
 según/nach /according to /d'après
 Öko-Tex Standard 100
 No. 06.0.44570 FI Hohenstein

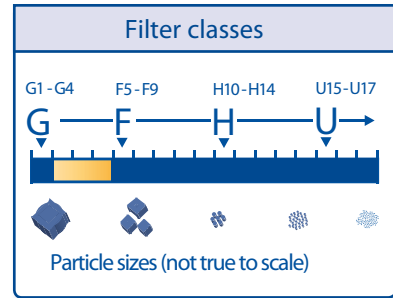

Applications

For rough dust filtration in aerial engineering devices of all kinds

- Heat ventilation and air conditioning devices
- Prefiltration in air-conditioning systems
- Prefiltration for painting and drying plants

Classification acc. to EN 779

- Filter class **G2 (EU2)**
- Filter class **G3 (EU3)**
- Filter class **G4 (EU4)**

Versions

- Standard mats 20 x 2m and 40 x 2m (depending on type)
- Precuts for finished dimensions
- Stamp pieces in various dimensions available
- Also available as filter tube or filter bag

Material characteristics

- Tested according to EN 779
- Shatter-proof synthetic fibres
- Fire prevention requirements according to DIN 53438 (F1)
- Humidity resistant up to 100% r. h.
- Temperature resistant up to max. 80°C
- Contains no silicone or other lacquer harming substances

Benefits of VOLZ Filters

Progressive structure

- The filter medium is compressed towards clean air side and takes full depth of fibrous web for dust absorption

Special prints

- Special prints are possible depending on certain quantities


Special precuts

- Special sizes are available for rolls and precuts depending on purchase quantity

- Filter medium is produced in our plant in Germany
- Quality control of the complete production with internal filter test equipment and modern quality-management-tools
- Öko-Tex Standard 100 - tested for harmful substances
- Environment-friendly and easily disposable

Versions rough filtration mats G2 - G4								
Product	Filter classes	Material thickness approx.	Surface weight approx.	Initial pressure drop *	Recommended final pressure drop	Nominal air flow rate	Air velocity	Average arrestance
		mm	g / m ²	Pa / m ²	Pa / m ²	m ³ / h / m ²	m / s	%
FL100	G2	5	100	20	250	5400	1.5	65 - 80
FL150	G2	10	150	25	250	5400	1.5	65 - 80
FL200	G3	20	200	35	250	5400	1.5	80 - 90
FL220	G4	22	220	35	250	5400	1.5	≥ 90
V15/350	G4	18	280	50	250	5400	1.5	≥ 90
V15/400	G4	22	350	60	250	5400	1.5	≥ 90
EA30	G4	30	350	60	250	5400	1.5	≥ 90
EA40	G4	40	400	60	250	5400	1.5	≥ 90
EA50	G4	50	450	65	250	5400	1.5	≥ 90

*plane tested

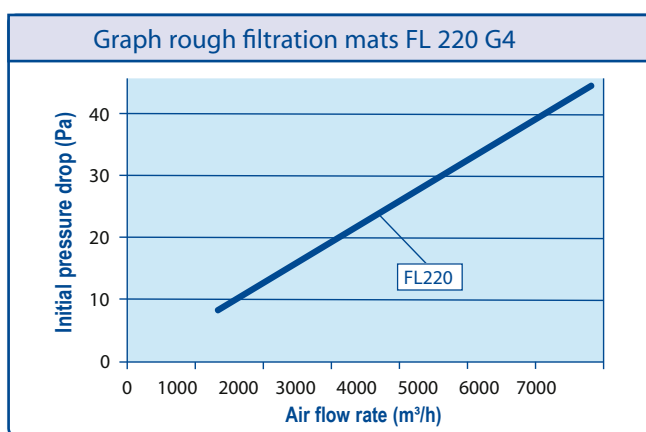

VOLZ Luftfilter GmbH & Co. KG

Robert-Bosch-Straße 25 Phone: +49 - (0)7451 - 5516 - 0 info@volzfilters.com
 D-72160 Horb am Neckar Fax: +49 - (0)7451 - 5516 - 120 www.danfilter.dk

All information, images and pictures are property of VOLZ Luftfilter GmbH & Co. KG and are provided to the best knowledge. However VOLZ Luftfilter GmbH & Co. KG does not guarantee the completeness or correctness and cannot be held responsible for damages caused by the recipient's usage or his confidence in the completeness or correctness of the information. The stated data contains average values with tolerances as a result of production irregularities; therefore it does not relieve the recipient of own examination and tests. For the correctness of the information in particular cases, an explicit and written affirmation through VOLZ Luftfilter GmbH & Co. KG is required. Furthermore, the data serves as a service description and cannot be interpreted as warranted properties or durabilities.